

# RIEGL VZ<sup>®</sup>-6000

- *better than 6,000 m measurement range*
- *exceptionally well suited for measuring snowy and icy terrain*
- *wide field of view, 60° x 360°*
- *high speed data acquisition up to 222,000 meas. / second*
- *high accuracy, high precision ranging based on echo digitization and online waveform processing*
- *multiple target capability - unlimited number of targets*
- *optional waveform data output*
- *built-in calibrated digital camera*
- *on-board inclination sensors*
- *integrated L1 GPS receiver with antenna*
- *integrated compass*
- *built-in SSD drive storage*
- *compact and rugged design*
- *advanced camera options*

This 3D VZ-Line Laser Scanner offers superior and unrivaled long range reflectorless measurement performance of more than 6,000 m.

RIEGL's unique V-Line technology is based on echo digitization and online waveform processing, which means that the VZ-6000 operates even in poor visibility and demanding multi target situations caused by dust, haze, rain, snow.

Due to its laser wavelength the instrument is exceptionally well-suited for measuring snowy and icy terrain.

## Modes of Operation:

- stand-alone operation with integrated graphical user interface via 7" touchscreen
- remote control via VNC Viewer with any standard tablet PC or other mobile device via WiFi
- remote operation with RiSCAN PRO installed on a notebook via LAN or WiFi connection
- customized operation by third party tools/applications based on RIEGL's well documented interfaces and scanner libraries (e.g., RIVLib).

## Typical applications include

- *Topography & Mining*
- *Glacier Mapping*
- *Snow Field Monitoring*
- *Long Range Monitoring*
- *Civil Engineering*
- *Archaeology*

visit our website  
[www.riegl.com](http://www.riegl.com)



# VZ®-6000 Key Features and Components



## Ultra Long Range Performance

The High-Speed, High-Resolution 3D Laser Scanner *RIEGL VZ-6000* offers an ultra long range of more than 6,000 m and a wide field of view of 60° vertical and 360° horizontal.

The high accuracy and reliability of range measurement performance is based on *RIEGL's* unique V-Line technology of echo digitization and online waveform processing. Extreme long range measurements can be achieved even with poor visibility and demanding multi target situations caused by dust, haze, rain, snow, etc.

## Built-in Camera

A built-in calibrated 5-Megapixel camera capturing images deflected by the laser mirror enables coverage of the entire field of view with an appropriate number of high resolution images automatically stitched together to create a high resolution panorama image. This panorama image, in combination with precise 3D measurements produced by the VZ-6000, enables the creation of photorealistic virtual models for geological and geotechnical investigations, avalanche research, geomorphology, and geological features.

## Waveform Data Output Option

The digitized echo signals, also known as waveform data, acquired by the *RIEGL VZ-6000* are the basis for waveform analysis. This data is provided via the optionally available waveform data output and accessible with the associated *RIEGL* software library RiWAVELib for investigations and research on multi target situations based on the digital waveform data samples of the target echoes.

## Compatible Software Packages

The *RIEGL VZ-6000* is compatible with the *RIEGL* software package RiSCAN PRO for terrestrial laser scanning, *RIEGL's* interface library RiVLib, as well as the workflow-optimizing software packages, e.g., RiMINING. The optional software plugin RiMTA TLS provides automatic assignment of the scan data to the correct MTA zone in multiple time around situations.

## Supported Registration Methods

### Direct Geo-Referencing

- integrated GPS receiver (L1) connected
- external high-end RTK GNSS receiver connected
- integrated compass, accuracy typ. 1° (one sigma value, available for vertical scanner setup position)
- on-board inclination sensors (tilt range  $\pm 10^\circ$ , accuracy typ.  $\pm 0.008^\circ$ )

### GNSS Traversing


- GNSS position (RTK or autonomous)
- on-board inclination sensors
- automatic acquisition of well known remote target (reflector)


### Free Stationing

- fast fine scanning of reflectors for precise determination of scanner position using control points

### Backsighting

- setup on well known point
- on-board inclination sensors
- precise fine scanning of well known remote target (reflector)

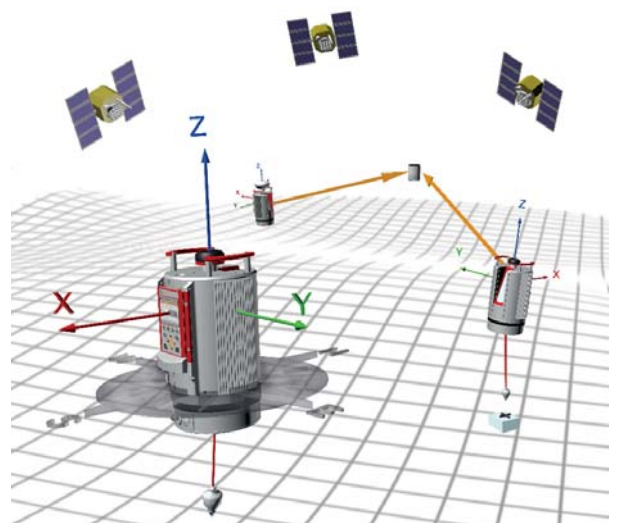


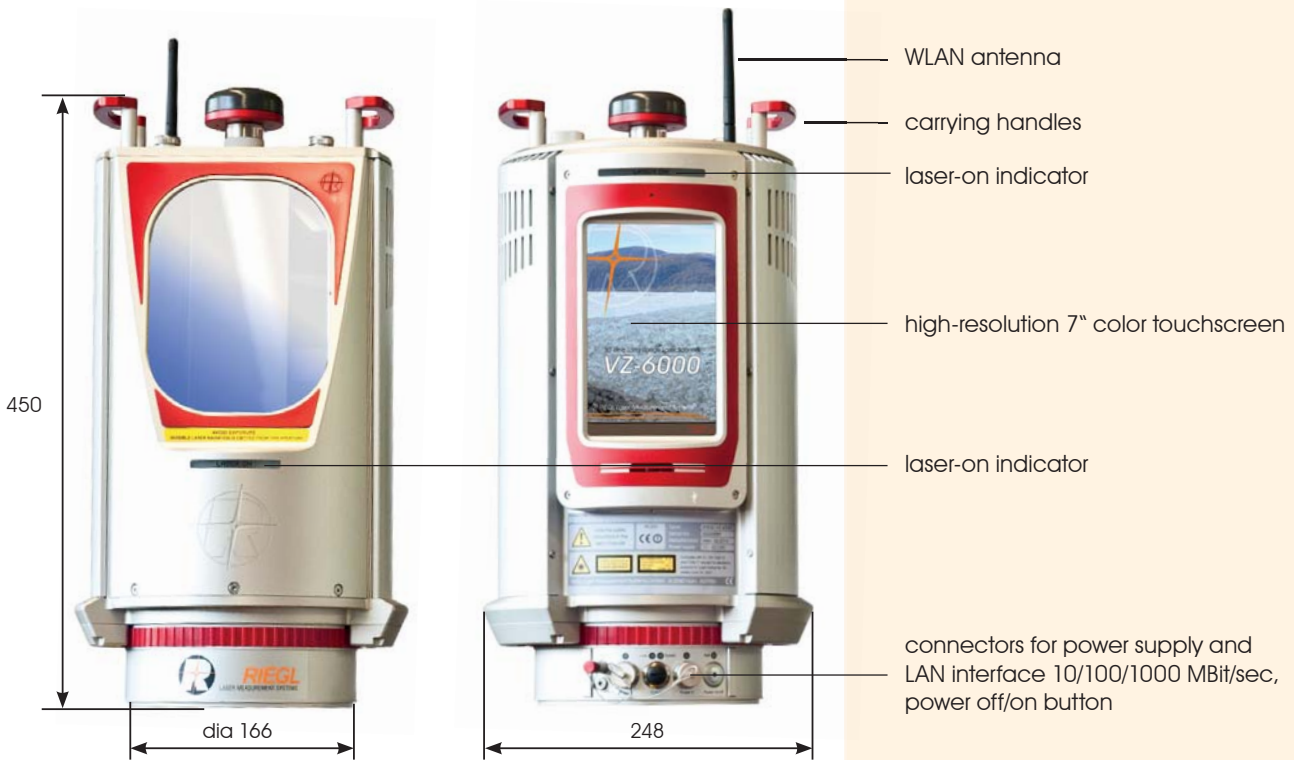

All dimensions in mm.


### Communication and Interfaces


- LAN port 10/100/1000 MBit/sec within base
- integrated WLAN interface with high-gain antenna
- USB 2.0 for connecting an external digital camera
- connector for GPS antenna
- two external power supply ports
- connector for external GPS synchronization pulse (1PPS)
- connector for external GNSS receiver

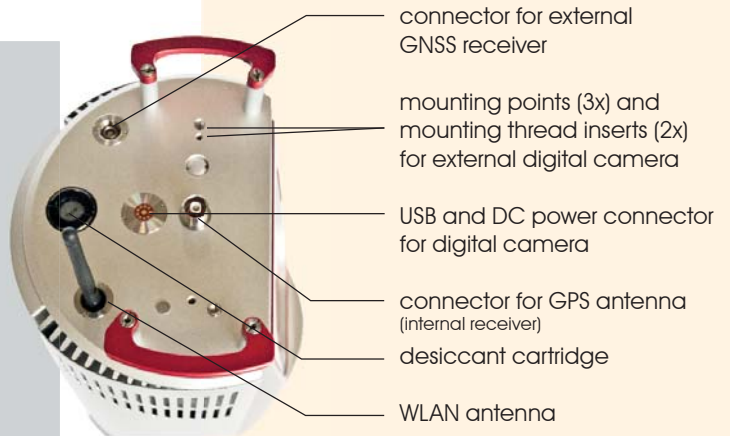


### Scan Data Storage

- **internal 80 GBytes SSD (Solid State Disc)** (2 GBytes reserved for the operating system)
- **external storage devices** (USB flash drives or external hard drives) **via USB 2.0 interface**

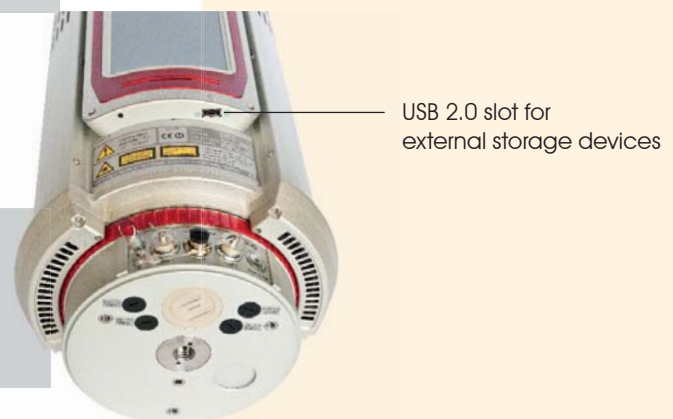


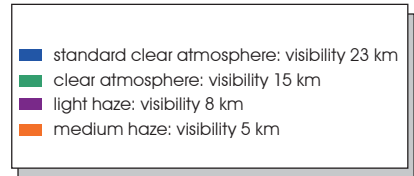


30 kHz PRR

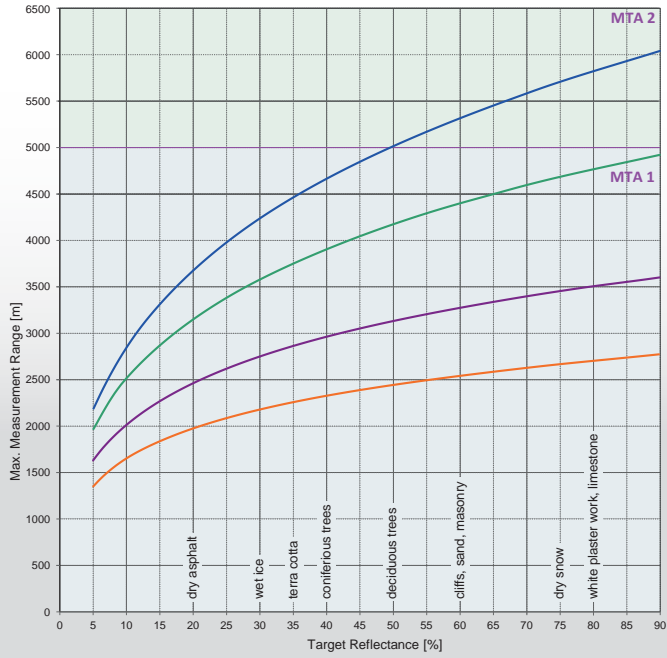


50 kHz PRR

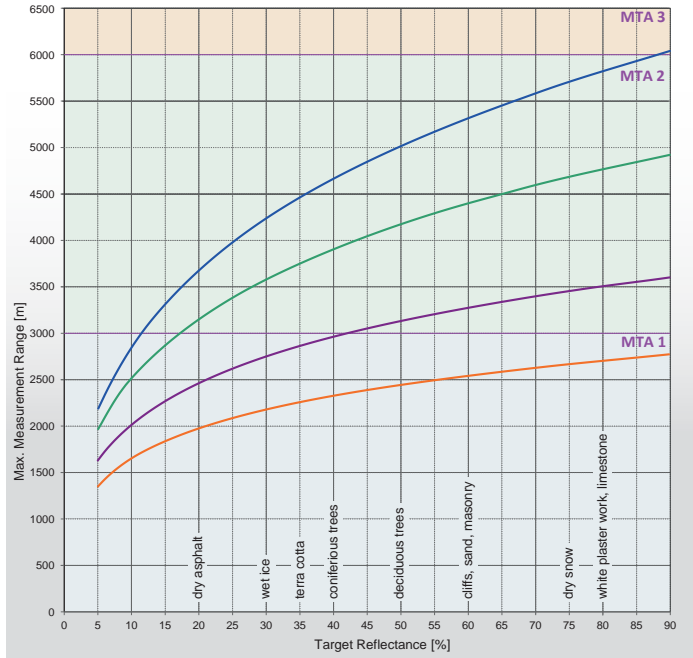

150 kHz PRR

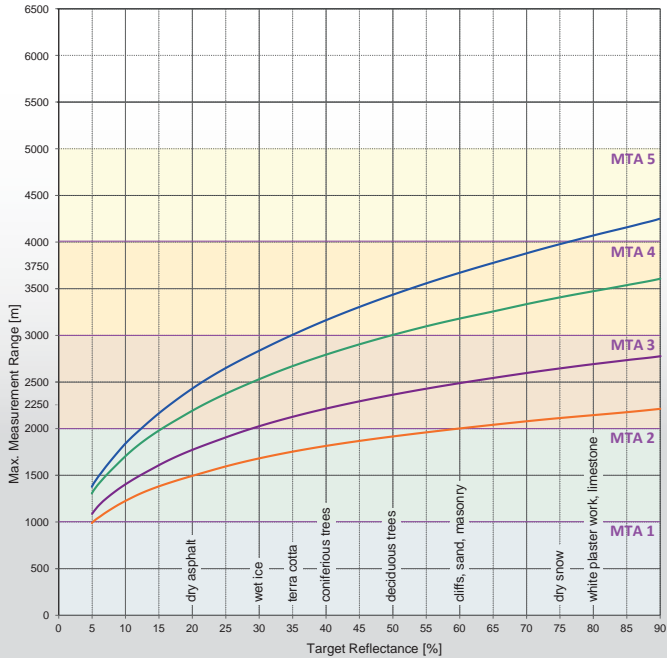

300 kHz PRR

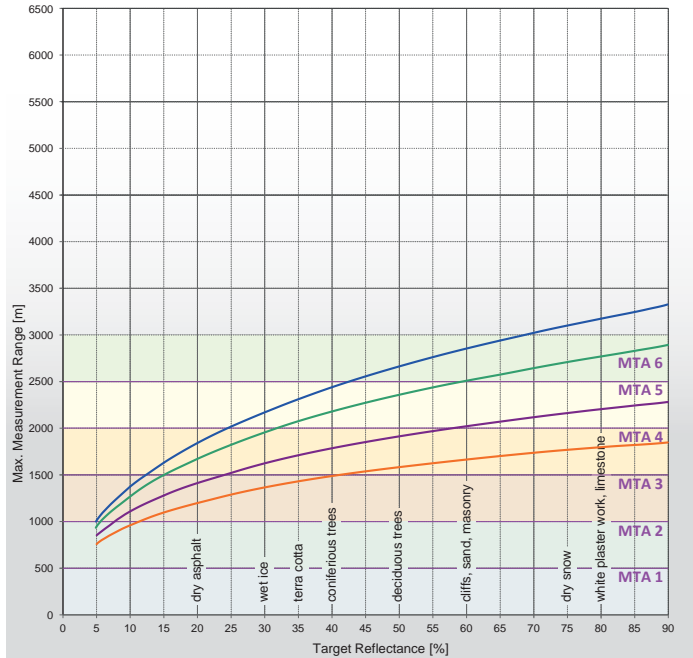

**The following conditions are assumed:**

- flat target larger than footprint of the laser beam
- perpendicular angle of incidence
- average brightness
- ambiguity resolved by post processing with RIMTA 3D

**MTA zones:**

- MTA 1: no ambiguity / 1 pulse „in the air“
- MTA 2: 2 pulses „in the air“
- MTA x: x pulses „in the air“

## User-Friendly and Efficient Operation and Acquisition Workflow

Operation is easy with the integrated graphical user interface via 7" touchscreen, or by remote control of the scanner via VNC Viewer with any tablet PC or mobile device via WiFi connection.

Highly efficient scan data acquisition and global registration is supported by on-board inclination sensors, integrated L1 GPS receiver, an interface for a high-end external GNSS receiver on top of the scanner, a digital compass and built-in SSD data storage media. With a visual project overview of acquired scan data, it is possible to ensure complete data coverage or check the progress of a project as it is acquired.

The system provides a number of useful features that help to make the user experience better overall. One of these features is the ability to schedule scans to be acquired fully automatically on a regularly defined time interval which is useful for capturing 4D (3D time-lapse) datasets without direct supervision of the system.



## Power Supply

- intelligent power supply management, up to three independent external power sources can be connected simultaneously for uninterrupted operation
- reliable under voltage and over voltage protection
- wide external voltage supply range 11-32 V DC
- power consumption typ. 75 W (max. 90 W)
- LED indicators for power status

## Camera Capabilities

### Advanced Camera Support Capability

The VZ-Line of scanners has been updated with advanced camera support capability. Utilizing a specialized interface and a universal mount system, *RIEGL* is able to provide support for a wide variety of industrial cameras in standalone operation. This development enables the VZ-6000 to **directly control, operate and acquire images from RGB, Thermal, Industrial and a number of other camera systems and types** without complex cabling, connections or the need of an external laptop. With simplified mount integrations, it is now possible to acquire advanced images from state-of-the-art camera technologies simply using *RIEGL* Terrestrial Laser Scanners.



# Technical Data RIEGL VZ®-6000

## Laser Product Classification

The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

## Class 3B Laser Product according to IEC 60825-1:2014



## Range Measurement Performance <sup>1)</sup>

### Measuring Principle

time of flight measurement, echo signal digitization, online waveform processing, full waveform export capability (optional) single pulse ranging

### Mode of operation

| Laser Pulse Repetition Rate PRR (peak) <sup>2)</sup>          | 30 kHz                              | 50 kHz                | 150 kHz               | 300 kHz               |
|---|-------------------------------------|-----------------------|-----------------------|-----------------------|
| Effective Measurement Rate (meas./sec) <sup>2)</sup>          | 23,000                              | 37,000                | 113,000               | 222,000               |
| Max. Measurement Range <sup>3)</sup>                          |                                     |                       |                       |                       |
| natural targets $\rho \geq 90\%$                              | 6,000 m <sup>4)</sup>               | 6,000 m <sup>4)</sup> | 4,200 m <sup>4)</sup> | 3,300 m <sup>4)</sup> |
| natural targets $\rho \geq 20\%$                              | 3,600 m                             | 3,600 m <sup>4)</sup> | 2,400 m <sup>4)</sup> | 1,800 m <sup>4)</sup> |
| Max. Number of Targets per Pulse                              | practically unlimited <sup>5)</sup> |                       |                       |                       |
| NOHD (Nominal Ocular Hazard Distance) <sup>6)</sup>           | 295 m                               | 220 m                 | 80 m                  | 40 m                  |
| ENOHD (Extended Nominal Ocular Hazard Distance) <sup>6)</sup> | 2,270 m                             | 1,790 m               | 1,010 m               | 690 m                 |

### Accuracy <sup>7) 9)</sup>

15 mm

### Precision <sup>8) 9)</sup>

10 mm

### Minimum Range

5 m

### Laser Wavelength

near infrared

### Laser Beam Divergence

0.12 mrad <sup>10)</sup>

### Laser Beam Footprint (Gaussian Beam Definition)

15 mm @ exit, 60 mm @ 500 m, 120 mm @ 1000 m, 240 mm @ 2000 m

1) With online waveform processing.

2) Rounded values, selectable by measurement program.

3) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence and for atmospheric visibility of 23 km. In bright sunlight, the operational range may be considerably shorter than under an overcast sky.

4) Ambiguity to be resolved by post-processing.

5) If the laser beam hits, in part, more than one target, the laser's pulse power is split accordingly. Thus, the achievable range is reduced. Details on request.

6) [E]NOHD values only applicable for 3D scan patterns with minimum angular stepwidths  $\geq 0.01$  degree. Rectangular scan patterns with angular stepwidths  $< 0.01$  degree and/or line scans (2D scans) have higher [E]NOHD values.

7) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

8) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

9) One sigma @ 150 m range under RIEGL test conditions.

10) Measured at the 1/e<sup>2</sup> points. 0.12 mrad corresponds to an increase of 12 mm of beam diameter per 100 m distance.

## Scanner Performance

### Scanning Mechanism

#### Vertical (Line) Scan

lightweight mirror  
rotating / oscillating / step-by-step  
total 60° (+30° / -30°)

#### Horizontal (Frame) Scan

rotating head

### Field of View (selectable)

100°/sec to 14,400°/sec (+ 20 rotations/sec), full FOV

max. 360°

### Scan Speed (selectable)

0.002° ≤ Δθ ≤ 0.280° <sup>12)</sup>

0°/sec to 60°/sec <sup>11)</sup>

### Angular Step Width Δθ (vertical), Δφ (horizontal)

between consecutive laser shots

0.002° ≤ Δφ ≤ 3° <sup>12)</sup>

better 0.0005° (1.8 arcsec)

between consecutive scan lines

integrated, for vertical scanner setup position, details see page 2

better 0.0005° (1.8 arcsec)

integrated, L1, with antenna

integrated, for vertical scanner setup position, details see page 2

integrated

integrated, for real-time synchronized time stamping of scan data

scanner rotation synchronization

providing digitized echo signal information for specific target echoes

11) Frame scan can be disabled, providing 2D scanner operation.

12) Selectable.

## General Technical Data

### Power Supply Input Voltage / Power Consumption

11 - 32 V DC / typ. 75 W (max. 90 W)

### Main Dimensions / Weight

248 x 226 x 450 mm (length x width x height), approx. 14.5 kg

### Humidity / Protection Class

max. 80 % non condensing @ +31°C / IP64, dust- and splash-proof

### Temperature Range

Storage / Operation

Low Temperature Operation <sup>13)</sup>

-10°C up to +50°C / 0°C up to +40°C (standard operation)

-20°C: continuous scanning operation if instrument is powered on while internal temperature is at or above 0°C and still air

## Integrated Digital Camera

field of view 7.2°x5.5° (v x h)


resolution 2560 x 1920 pixels (5 Mpixel), automatic exposure control

## Display

7" WVGA (800 x 480) color

capacitive touchscreen, full operation control for stand alone usage

13) Insulating the scanner with appropriate material will enable operation at even lower temperatures.

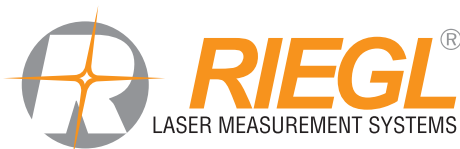

**RIEGL Laser Measurement Systems GmbH**  
Riedenburgstraße 48  
3580 Horn, Austria  
Phone: +43 2982 4211 | Fax: +43 2982 4210  
office@riegl.co.at  
www.riegl.com

**RIEGL USA Inc.**  
Orlando, Florida | info@rieglusa.com | www.rieglusa.com  
**RIEGL Japan Ltd.**  
Tokyo, Japan | info@riegl-japan.co.jp | www.riegl-japan.co.jp  
**RIEGL China Ltd.**  
Beijing, China | info@riegl.cn | www.riegl.cn

[www.riegl.com](http://www.riegl.com)