



NEW

RIEGL miniVUX-1 UAV[®]



The new **RIEGL miniVUX-1 UAV** is a user-friendly and cost-efficient device to acquire survey-grade measurement data by use of remotely piloted multi-rotor, rotary-wing, or fixed-wing UAVs for a variety of applications.

Based on **RIEGL's** sophisticated Waveform-LiDAR technology, the **RIEGL miniVUX-1 UAV** provides high-speed data acquisition using echo signal digitization and online waveform processing. Its excellent multiple target capability achieves superior measurement results.

The 360° field of view allows complete acquisition of the environment, and a well designed housing supports mounting even with restricted weight and space requirements.

RIEGL offers user-friendly, installation- and application-oriented solutions for the integration of the miniVUX-1 UAV, from the stand-alone sensor to fully-integrated **RIEGL** airborne laser scanning systems.



Miniaturized LiDAR Sensor for Unmanned Laser Scanning

Typical applications include

- Agriculture & Forestry
- Glacier and Snowfield Mapping
- Archeology and Cultural Heritage Documentation
- Construction-Site Monitoring
- Landslide Monitoring



www.riegl.com



RIEGL miniVUX-SYS System Integration Options

RIEGL miniVUX-1UAV




- stand-alone LiDAR sensor
- very lightweight (1.55 kg without cooling fan)

RIEGL miniVUX-1UAV with APX-15 UAV¹⁾



- IMU/GNSS system fully integrated
- well suited for integration into fixed-wing UAVs
- total weight approx. 2 kg

RIEGL miniVUX-1UAV with AP20¹⁾ and Control Unit

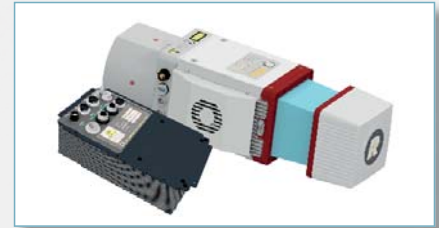

- higher-grade IMU/GNSS system and control unit
- well suited for integration into single-rotor and multi-rotor UAVs
- total weight approx. 3.6 kg

Find your perfect system!

Please contact sales@riegl.com to get more detailed information on the available solutions and to find the system perfectly suited for your application and needs.

¹⁾ See technical details at the corresponding Applanix datasheet.

Highlights

- extremely lightweight (1.55 kg / 3.4 lbs stand-alone LiDAR sensor without cooling fan)
- compact (243 x 111 x 85 mm), robust aluminum housing
- 360° field of view
- exceptionally suited to measure in snowy and icy terrains
- RIEGL's unique echo signal digitization and online waveform processing
- multiple target capability – up to 5 target echoes per laser shot
- narrow measurement beam with low divergence for high spatial resolution
- mechanical and electrical interface for IMU mounting

RIEGL miniVUX®-1 UAV Technical Data

- max. operating flight altitude AGL
- pulse repetition rate PRR (peak)
- eye safe operation at Laser Class 1
- online waveform processing
- multiple target capability

Eye Safety Class	Laser Class 1
Max. Range @ Target Reflectivity 60%	250 m
Max. Range @ Target Reflectivity 20%	150 m
Minimum Range	3 m
Accuracy / Precision	15 mm / 10 mm
Max. Effective Measurement Rate	up to 100,000 meas./sec
Field of View (FOV)	up to 360°
Max. Operating Flight Altitude AGL	100 m / 330 ft


Class 1 Laser Product according to IEC 60825-1:2014



compact & lightweight miniVUX®-1UAV



RIEGL miniVUX®-1UAV stand-alone with protective cap

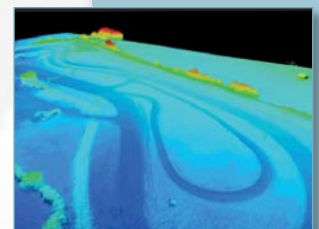

RIEGL miniVUX®-1UAV scan data



RIEGL miniVUX-1UAV Data Sheet



Watch our videos!
youtube.com/rieglms

Copyright RIEGL Laser Measurement Systems GmbH © 2017– All rights reserved. Use of this data sheet other than for personal purposes requires RIEGL's written consent. This data sheet is compiled with care. However, errors cannot be fully excluded and alternations might be necessary.

www.riegl.com

