
NEW

RIEGL miniVUX®-4UAV

- *100 kHz / 200 kHz / 300 kHz / 400 kHz laser PRR selectable*
- *measurement rate up to 200,000 measurements/sec*
- *scan speed up to 150 scans/sec*
- *very compact & lightweight (1.55 kg / 3.4 lbs)*
- *up to 360° field-of-view*
- *robust aluminum housing, ready to be mounted on multi-rotor, rotary-wing, and fixed-wing UAVs*
- *makes use of RIEGL's unique echo signal digitization and online waveform processing*
- *multiple target capability – up to 5 target echoes per laser shot*
- *mechanical and electrical interface for IMU mounting*
- *RIEGL RiLOC IMU/GNSS system solutions available*
- *exceptionally well suited to measure in snowy and icy terrains*
- *user-friendly, application- and installation-oriented solutions for integration*

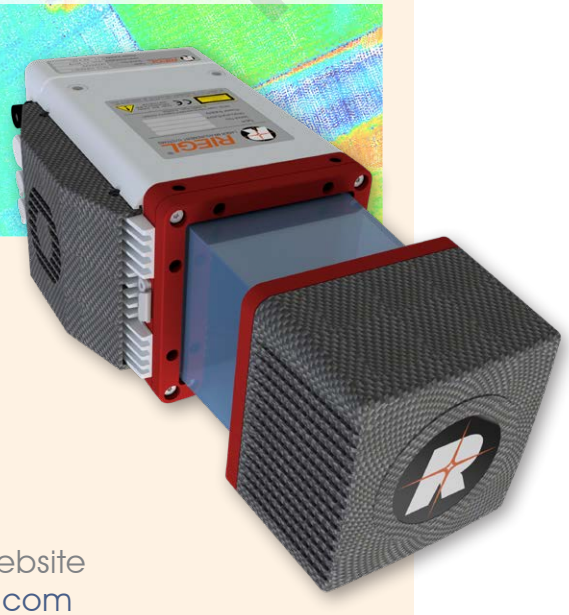

The *RIEGL* miniVUX-4UAV is an extremely lightweight airborne laser scanner, designed specifically for integration with UAS/UAV/RPAS. The sensor offers a selectable laser pulse repetition rate (PRR) of 100 kHz, 200 kHz, 300 kHz, and 400 kHz. With 400 kHz PRR, it provides up to 133,333 measurements per second at 120° FoV and thus a dense point pattern on the ground for UAV-based applications that require the acquisition of small objects.

Together with an improved laser beam divergence and accuracy specifications of 12 mm accuracy and 8 mm precision, it delivers dense point patterns and highly detailed data for demanding UAV-based applications.

The small and sophisticated design of the stable aluminum housing offers various integration possibilities with platforms that provide restricted space or payload capabilities. The 360° field of view allows complete acquisition of the environment.

An easy-to-remove SD card for data storage and/or the option for streaming the scan data via LAN-TCP/IP interface, in combination with the modest power consumption of the scanner, enable straight-forward integration with most UAS/UAV/RPAS types.

The *RIEGL* miniVUX-4UAV makes use of *RIEGL's* unique Waveform-LiDAR technology, allowing echo digitization and online waveform processing. Multi-target resolution is the basis for penetrating even dense foliage. As a further special feature, the wavelength is optimized for the measurement of snowy and icy terrain.

In addition to the stand-alone version of the miniVUX-4UAV, *RIEGL* also offers system solutions with integrated camera and IMU/GNSS systems, e.g. with *RIEGL* RiLOC-E[25] or RiLOC-F.

PRELIMINARY

Typical applications include

- *Agriculture & Forestry*
- *Archeology and Cultural Heritage Documentation*
- *Construction-Site Monitoring*
- *Topographic & Corridor Mapping*
- *Snow, Glacier & Environmental Mapping*
- *Slope, Landslide & Erosion Monitoring*

visit our website
www.riegl.com

RIEGL®
LASER MEASUREMENT SYSTEMS

Laser Product Classification	Class 1 Laser Product according to IEC 60825-1:2014 The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2019.



Range Measurement Performance

Measuring Principle: time of flight measurement, echo signal digitization, online waveform processing

Laser Pulse Repetition Rate PRR [1]	100 kHz / 200 kHz	200 kHz reduced power, 360° FOV	300 kHz / 400 kHz
Max. Measuring Range [2]			
natural targets ρ ≥ 20 %	170 m	150 m	170 m
natural targets ρ ≥ 60 %	290 m	250 m	290 m
natural targets ρ ≥ 80 %	330 m	280 m	330 m
Typ. Operating Flight Altitude AGL [1] [3]			
natural targets ρ ≥ 20 %	100 m (330 ft)	85 m (280 ft)	100 m (330 ft)
natural targets ρ ≥ 60 %	160 m (525 ft)	140 m (460 ft)	160 m (525 ft)
Max. Number of Targets per Pulse [4]	5	5	5

1) Rounded values.
2) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under overcast sky.
3) Flat terrain assumed, scan angle ±45° FOV
4) If more than one target is hit, the total laser transmitter power is split and, accordingly, the achieveable range is reduced.

Minimum Range	2 m
Accuracy [5] [7]	12 mm
Precision [6] [7]	8 mm
Laser Pulse Repetition Rate [1]	100 kHz / 200 kHz / 300 kHz / 400 kHz (selectable)
Max. Effective Measurement Rate [1]	up to 200 000 meas./sec. (@ 200 kHz PRR reduced power & 360° FOV)
Echo Signal Intensity	for each echo signal, high-resolution 16 bit intensity information is provided
Laser Wavelength	near infrared
Laser Beam Divergence [8]	1.25 x 0.5 mrad
Laser Beam Footprint	125 mm x 50 mm @ 100 m

5) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.
6) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.
7) One sigma @ 50 m range under *RIEGL* test conditions.
8) Measured at 50% peak intensity, 1.25 mrad corresponds to an increase of 125 mm of beam diameter per 100 m distance.

Scanner Performance

Scanning Mechanism	rotating mirror
Field of View (selectable)	360° @ 100 kHz, 200 kHz reduced power 180° @ 200 kHz 120° @ 300 kHz, 400 kHz
Scan Speed (selectable)	10 - 150 scans/sec[9] @ 100 kHz, 200 kHz reduced power 20 - 150 scans/sec[9] @ 200 kHz 30 - 150 scans/sec[9] @ 300 kHz 40 - 150 scans/sec[9] @ 400 kHz
Angular Step Width Δ φ (selectable) between consecutive laser shots	0.018° ≤ Δ φ ≤ 0.54°
Angle Measurement Resolution	0.001°

9) equivalent to revolutions per second

Interfaces

Configuration, Scan Data Output & Communication with External Devices	2 x LAN 10/100/1000 Mbit/sec WLAN IEEE 802.11 a/b/g/n
GNSS Interface [10]	Serial RS-232 interface for data string with GNSS-time information, TTL input for 1 PPS synchronization pulse.
General IO & Control [11]	2 x TTL input/output, 1 x Remote on/off
Camera Interface	2 x GNSS RS-232 Tx & PPS, Power, Trigger, Exposure
Memory Card Slot	for SDHC/SDXC memory card 32 GByte (can be upgraded to 128 GByte)

10) internally available (not available with standard interface box)
11) 1x externally available with standard interface box

General Technical Data

Power Supply Input Voltage / Consumption	11 - 34 V DC / typ. 25 W @ 150 scans/sec
Main Dimensions (L x W x H) / Weight	
with Cooling Fan	243 x 111 x 85 mm / approx. 1.6 kg
without Cooling Fan	243 x 99 x 85 mm / approx. 1.55 kg
Humidity	max. 80 % non condensing @ 31°C
Protection Class	IP64, dust and splash-proof
Temperature Range [12]	-10°C up to +40°C (operation) / -20°C up to +50°C (storage)

12) Continuous operation at ambient temperature of ≥ 30°C (≥ 86°F) requires a minimum amount of air flow at approx. 3 m/s. For applications where a 3 m/s air flow along the cooling fins cannot be guaranteed, the cooling fan has to be used.

PRELIMINARY

Copyright *RIEGL* Laser Measurement Systems GmbH © 2026– All rights reserved.

Besides of the stand-alone miniVUX-4UAV LiDAR engine, *RIEGL* offers also system solutions, combining the miniVUX-4UAV with IMU/GNSS systems of different performance and of different form factors as well as optional RGB camera systems.

Below you can find the most common configurations offered for *RIEGL* miniVUX-SYS systems based on the *RIEGL* miniVUX-4UAV LiDAR sensor.
For more detailed information and further possible *RIEGL* miniVUX-SYS configurations, lease contact sales@riegl.com

RIEGL miniVUX-SYS IMU/GNSS Integration Options

RIEGL miniVUX-4UAV with RiLOC®-E^{25} / RiLOC®-F




- *RIEGL*'s IMU/GNSS solution integrated with LiDAR engine
- total weight approx. 1.84 kg
- interfaces for up to 2 cameras
- suited for integration into multi-rotor UAVs

IMU/GNSS (optional)	*RIEGL* RiLOC-E^{25} [1]	*RIEGL* RiLOC-F [1]
Orientation Accuracy [2]		
Roll, Pitch	0.010°	0.005°
Heading	0.025°	0.020°
Orientation Sampling Rate	up to 700 Hz	up to 700 Hz
Position Accuracy (typ.)	0.02 - 0.04 m	0.02 - 0.03 m
System Total Weight (approx.)	1.84 kg	1.84 kg

1) See technical details at the according RiLOC infosheet
2) Accuracy specifications for post-processed data


RIEGL Integration Kit 400

A special add-on to the *RIEGL* miniVUX-SYS allows for straight forward integration with your multi-rotor UAV, e.g. a DJI Matrice M400. Please contact sales@riegl.com to get more detailed information.



RIEGL miniVUX-4UAV on RIEGL Integration Kit 400

- add-on to the miniVUX-SYS coming with shock-absorbing mounting-kit, power supply module, GPS-antenna & mount, locking device, and cabling
- total weight approx. 0.55 kg (without sensor and camera)
- suited for integration into DJI M400 multi-rotor UAVs

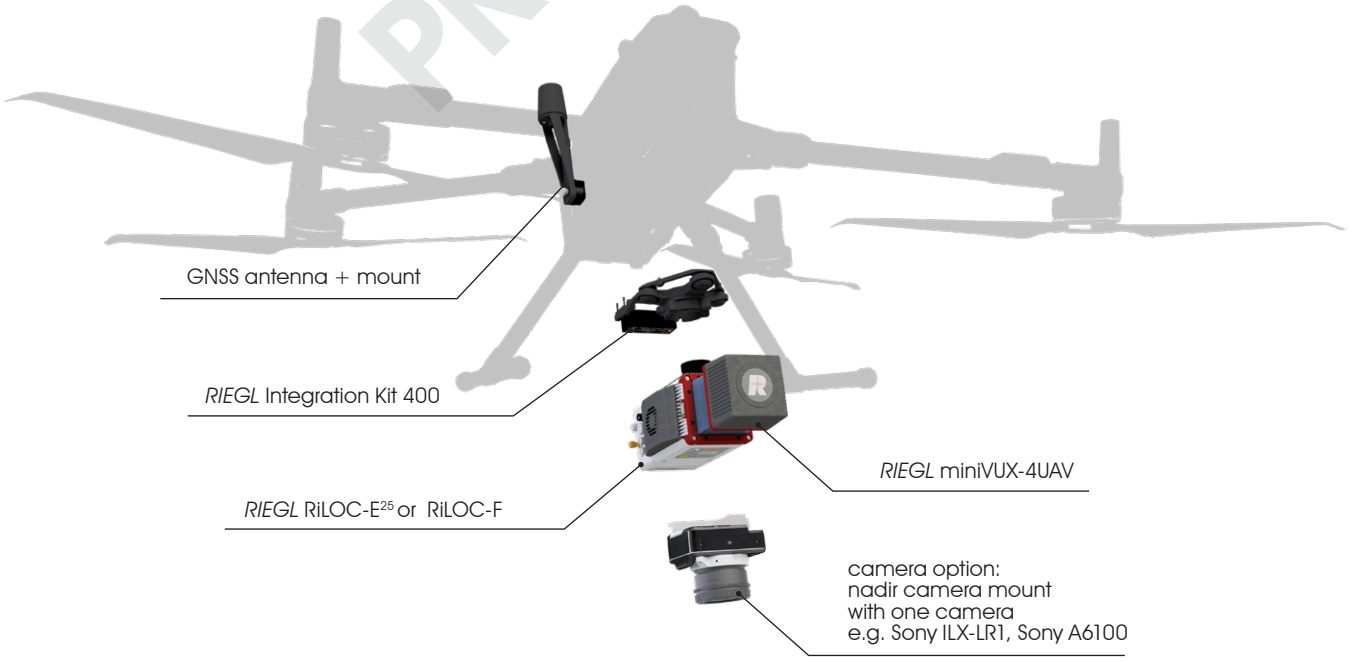

PRELIMINARY

 Copyright *RIEGL* Laser Measurement Systems GmbH © 2026– All rights reserved.

RIEGL miniVUX-4UAV LiDAR Sensor equipped with RiLOC®-E[25] / RiLOC®-F




with RGB camera [1]

1) Versatile camera options (e.g. Sony Alpha 6100, Sony ILX-LR1).


Please contact sales@riegl.com to get more detailed information.

Maximum Measurement Range vs. Target Reflectance *RIEGL* miniVUX®-4UAV

PRR = 400 kHz

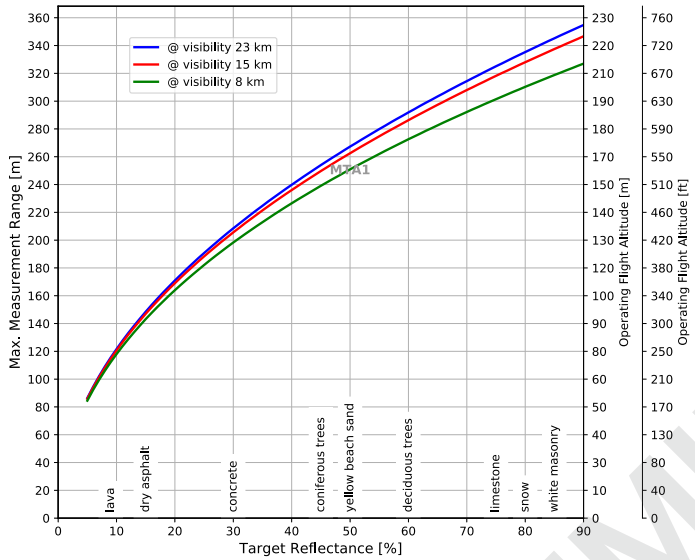


Operating Flight Altitude AGL given for the following conditions:
FOV of +/-45°, target size ≥ laser footprint, average ambient brightness

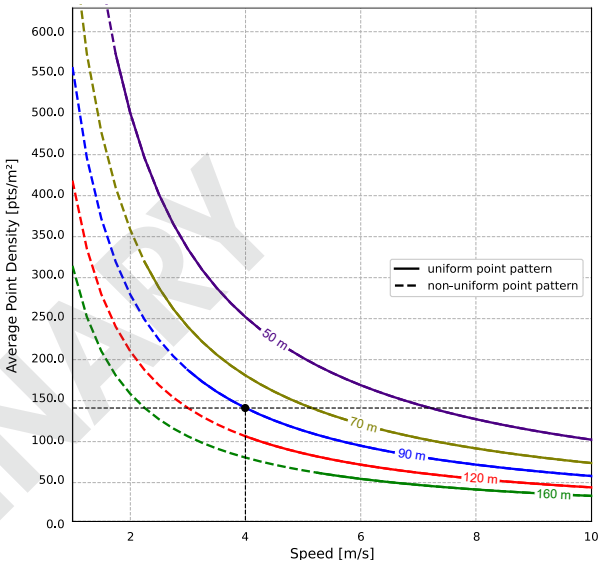

Example: miniVUX-4UAV at 400,000 pulses/second, speed = 4 m/s,
range to target = ~ 90 m, resulting point density ~ 139 pts/m²

PRELIMINARY

Dimensional Drawings *RIEGL* miniVUX®-4UAV Stand-Alone

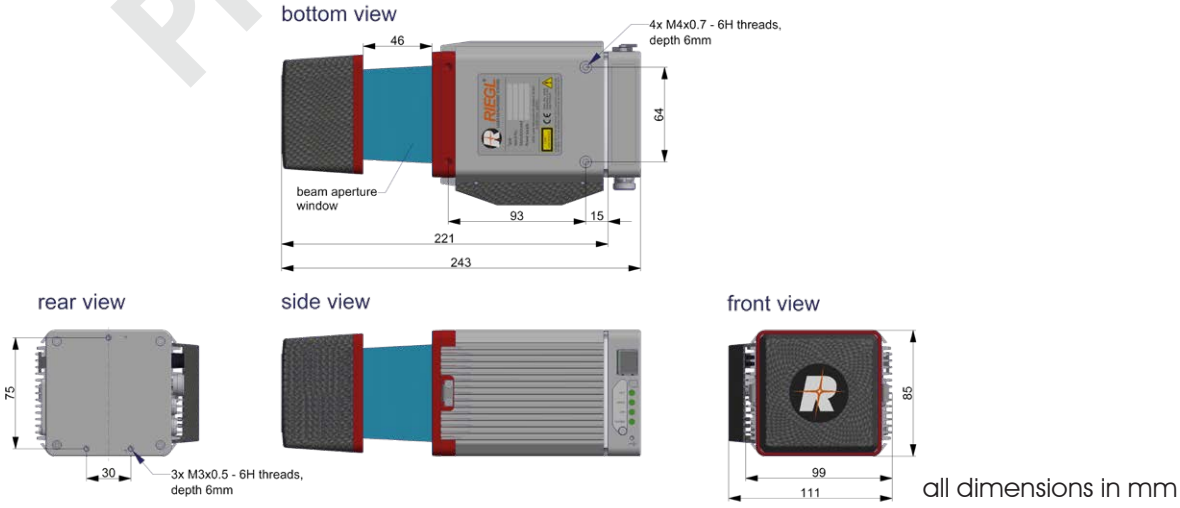

all dimensions in mm

RIEGL Laser Measurement Systems GmbH, *Headquarters*
RIEGL USA Inc., *Headquarters North America*

RIEGL Japan Ltd.
RIEGL China Ltd.
RIEGL Australia Pty Ltd.
RIEGL Canada Inc.
RIEGL UK Ltd.
RIEGL Asia Pacific Ltd.
RIEGL South America SpA
RIEGL Deutschland Vertriebsgesellschaft mbH
RIEGL France SAS

Contact us

Copyright *RIEGL* Laser Measurement Systems GmbH © 2026 – All rights reserved.
Use of this data sheet other than for personal purposes requires *RIEGL's* written consent.
This data sheet is compiled with care. However, errors cannot be fully excluded and alternations might be necessary.